proxSafe[®] flexx locker F12

Specifications



Technical Specifications

Outer Dimensions WxHxD:	630 x 1920 x 221 mm
Inner Dimensions (per compartment) WxHxD:	124 x 342 x 100 mm
Weight:	115 kg
Housing material:	sheet steel 12.03
Colour:	powder coated, frame DB 502, doors similar RAL 9006
Operating temperature:	+5+50 °C
Relative humidity:	595 %, non-condensing
Power requirement:	110240 VDC
Frequency Compartment ID:	125 kHz
Backup Battery:	12 VDC / 2.3 Ah
Digital Output:	4x 30 VDC / 1 A for up to 16 alarms
Certifications:	CE

Product description

The proxSafe[®] flexx locker F12 is an electronic locker system to store and manage radios. Its 12 compartments are large enough to store all popular radios. The compartments also offer enough space to mount a charging dock. The system offers smart features, e.g., to always issue the radio that is charged the most.

Each compartment is individually controlled. The user must identify at the user terminal to take out or return a radio. The system automatically manages access rights and generates electronic reports of all removals and returns.

The flexx locker F12 can be equipped with RFID readers in each compartment (optional) to track if the radio has been properly taken out or returned.

Features


- Easy customization for any radio type
- Large compartments with enough space for charging docks
- Emergency opening in case of power failure
- Standalone mode in case of network errors
- Smart features to extend radios' lifetime and increase availability

Product family

proxSafe[®] is an intelligent management system for keys and equipment with comprehensive audit and reporting capabilities. Control access to individual items and restrict when they can be taken. Keys, radios, test equipment, tools, laptops and more can be managed efficiently with increased accountability. The powerful software Commander Connect allows easy configuration and control of users, access rights, time profiles and the creation of individual reports.

Notes

The flexx locker F12 comes with two mounting plates for each of its 12 compartments, one to mount the RFID reader and one to mount the charging dock.



For access to our specification libraries visit: go.deister.com/ab56


proxSafe[®] flexx locker F12


Specifications

Dimensions

All dimensions in mm.

387

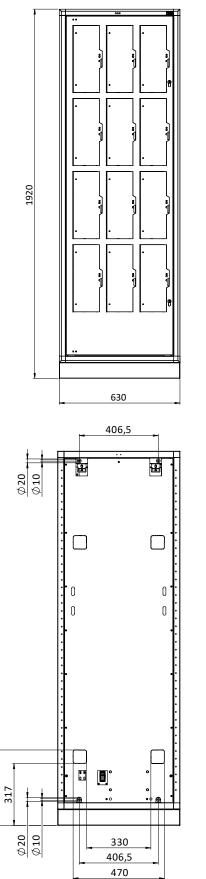

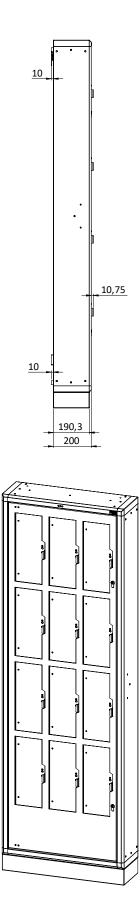

For more information and your nearest point of contact, please refer to <u>www.deister.com</u>. Technical data are subject to change without notice at any time. All rights reserved. © Copyright 2022 by deister electronic flexx-locker_f12_datasheet_en_v220831